

ROUGH-TERRAIN SCISSOR LIFTS

H12 SXL
H15 SXL
H18 SXL



- 23 ft 11 in x 6 ft 2 in (7.3 m x 1.9 m) platform.*
- 1545 lb (700 kg) platform capacity.
- Rated capacity includes twin extension decks.
- 40% gradeability.
- Standard 4 wheel drive.

* with both extension decks fully extended.

ISO 9001
GROUP
PINGUELY
HAULOTTE



ARTICULATED BOOMS



VERTICAL MASTS



TELESCOPIC BOOMS



SCISSOR LIFTS



TRAILERS

Haulotte®



ON THE UP

H12 SXL H15 SXL H18 SXL

Rough-terrain scissor lifts

The Haulotte® advantages

- Double extension decks for increased working area
- Hydraulic differential lock for improved rough terrain capability
- Maximum drive speed : 6 km/h / 3,7 mph
- Compact stowed height and width makes transportation and manoeuvrability easier
- Quick acting stabilisers suitable for levelling on most terrains
- Foam filled tyres
- Full proportional controls
- Robust, reliable and easy to maintain design

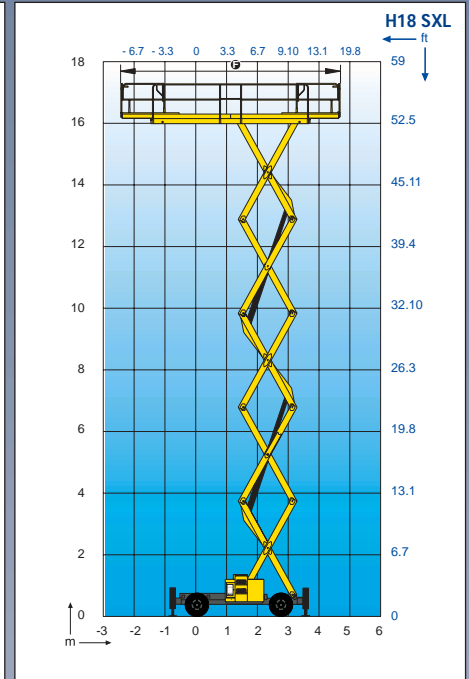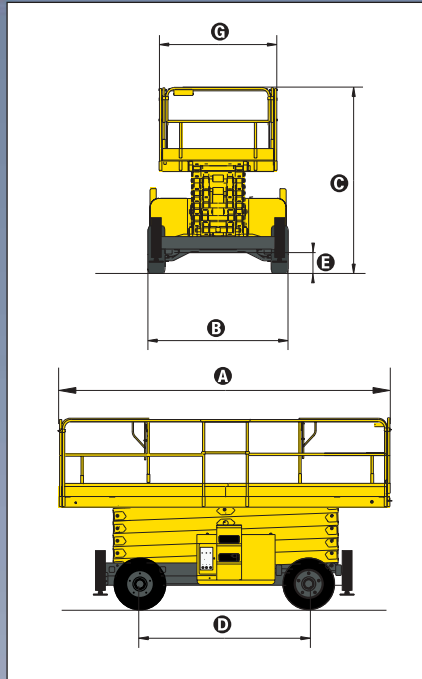

STANDARD FEATURES

- Hatz "silent pack" diesel engine
- 4 wheel drive (2 front steering wheels)
- 5° tilt alarm
- Load limiter in platform
- 12 V - 95 Ah batteries
- 14 V - 50 A alternator
- Removable operator's control box
- Free wheeling device
- Hourmeter
- Horn
- Towing hooks
- Hydraulic brakes
- Manual emergency lowering system
- Automatic levelling outriggers

OPTIONS & ACCESSORIES

- Catalytic exhaust
- Rotating beacon
- Travel alarm
- Extra wide tyres 12 x 16,5
- Mains power outlet on platform
- Working light
- Encoded starting device
- Biodegradable hydraulic oil
- Motion alarm for movements and translation
- Non-marking tyres
- Cold weather kit
- Hot weather kit

SPECIFICATIONS

	H12 SXL		H15 SXL		H18 SXL	
Working Height	39ft	12 m	49ft	15 m	59ft	18 m
Platform Height	33ft	10 m	43ft	13 m	53ft	16 m
Platform Capacity	1,540 lb	700 kg	1,103 lb	500 kg	1,103 lb	500 kg
A Length	17 ft 4 in / 5.30 m					
B Width	7 ft 5 in / 2.25 m					
C Stowed Height	8 ft 5 in	2.57 m	9 ft 1 in	2.77 m	9 ft 8 in	2.97 m
Travel/transport Height	5 ft 7 in	1.71 m	6 ft 3 in	1.91 m	6 ft 11 in	2.11 m
D Wheelbase	9 ft / 2.75 m					
E Ground clearance	10.62 in / 27 cm					
FxG Platform size	23 ft 11 in x 6 ft 2 in / 7.30 m x 1.90 m					
Platform extension	3 ft 3 in / 1 m					
Drive speed	1 / 1.99 / 3.7 mph / 1.6 / 1.3 / 2.6 km/h					
Outside turning radius	20 ft 4 in / 6.20 m					
Raise / Lower speed	43 / 65 sec.		46 / 57sec.		60 / 60 sec.	
Power source	HATZ - 2L41C - 32.6 ch tr/mn					
Gradeability	40%					
Tyres (Foam Filled)	10 x 16.5"					
Hydraulic tank	22 gallons - 100 l					
Fuel tank	14 gallons - 65 l					
Weight	12,566 lb	5,700 kg	14,396 lb	6,530 kg	16,513 lb	7,490 kg

CE AS1418.10

D I S T R I B U T E D B Y



Haulotte®